



10/10/04  
2005



INVESTOR IN PEOPLE

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D 04 MAY 2004

WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 16 April 2004

BEST AVAILABLE COPY



# The Patent Office

17JAN03 E777967-1 D00354  
P01/7706090-0301091.5

## Request for grant of a patent

(see the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1.	Your reference	PBA/D089274PGB		
2.	Patent application number (The Patent Office will fill in this part)	0301091.5		17 JAN 2003
3.	Full name, address and postcode of the or of each applicant (underline all surnames)	ROBERT JOHN <u>MABBOTT</u> 12 KENT AVENUE BEDFORD BEDFORDSHIRE MK42 9SJ		
Patents ADP number (if you know it)				
If the applicant is a corporate body, give the country/state of its incorporation				
4.	Title of the invention	PROVISION OF IMAGES ON SURFACES		
5.	Name of your agent (if you have one)	Marks & Clerk		
	"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	Sussex House 83-85 Mosley Street Manchester M2 3LG		
	Patents ADP number (if you know it)	18004 ✓		
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day/month/year)
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day/month/year)	
8.	Is a statement of Inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	YES		

08545 93 1001

## Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form	-
Description	10
Claim(s)	3
Abstract	
Drawing(s)	1 only <i>for</i>

10. If you are also filing any of the following, state how many against each item.

## Priority documents

Translations of priority documents

Statement of Inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (Please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature..... Date 17 January 2003  
MARKS & CLERK

12. Name and daytime telephone number of person to contact in the United Kingdom

P.B. ATKINSON - 0161 233 5824

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

## PROVISION OF IMAGES ON SURFACES

The present invention relates to the provision of images on surfaces, particularly (but not necessarily) flexible surfaces. The invention relates more particularly to an image sheet and also to the use of the image sheet for applying a marking to the surface, particularly of a flexible material such as for example leather, synthetic polymer or textile material.

The invention relates more particularly but by no means exclusively to image sheets for use in, and methods for applying images to, shoes such as fashion shoes and recreational shoes (e.g. sports and walking shoes).

Although many techniques for 'marking' (which term as used herein includes "colouring") sheets of flexible material (e.g. leather) and pre-formed articles are known, many suffer from disadvantages. For example, leather goes through many manual steps to make the many colours and specialist finishes that are produced either as part of a tanneries product offering or are specific to customer specification and requirements. These methods can be very labour intensive and are not always repeatable.

Furthermore the fashion industry needs to be able to respond relatively quickly to changes in taste (e.g. colouration) and/or design or markings on products and existing techniques do not always allow changes to be made rapidly. Furthermore considerable investment may have been made for a particular colouration and/or marking and the manufacturer may be loathe to make changes, in spite of the fashion trends.

WO-A-0187643 discloses a technique for applying an image to a non-planar surface using an image sheet comprised of a Shape Memory Polymer (or like material) which is a material that is able quickly to change from 'hard' to 'soft' when heated and regain original hardness quickly when cooled. When heated to the glass transition temperature ( $T_g$ ), the SMP can easily be remoulded to take on a new shape

when cooled. Once the SMP is again exposed to temperatures in excess of  $T_g$ , the memory effect urges the SMP to regain its original process shape). It is the existence of a large and reversible change in elastic modulus across the glass transition temperature ( $T_g$ ) which makes shape change and shape retention possible.

The disclosure of WO-A-0187643 is concerned particularly with a transfer operation in which an image carried by the SMP is transferred to provide a marking on the non-planar (usually rigid) surface. The marking of a model racing car is specifically disclosed. More particularly, the process of WO-A-0187643 involves conforming the layer of the SMP to the actual shape of the article to be imaged and then effecting transfer of the image from the SMP layer onto the article. The release of the image from the SMP layer occurs because it was found, in accordance with the disclosure of WO-A-0187643 that the SMP had an unexpected surface release properties which enabled it to (i) serve as a carrier for the image, and (ii) release the image so as to effect the image transfer.

Reference is also made in WO-A-0187643 to a technique in which both the SMP and its image are bonded to the surface of a 3-Dimensional object, but without further detailed description.

According to a first aspect of the present invention there is provided a method of providing a surface of a material with an image, the method comprising applying to the surface an image sheet comprised of:

- (i) a flexible layer of a Shape Memory Polymer (or like material), and
- (ii) an image bonded to said layer by means of an image key coat,

and bonding said image sheet to the surface by means of an adhesive and a process which involves heating of the Shape Memory Polymer (or like material) to a temperature above its Glass Transition Temperature.

According to a second aspect of the present invention there is provided an image sheet comprised of:

- (i) a flexible layer of a shape memory polymer (or like material), and

- (ii) an image bonded to said layer by means of an image key coat.

According to a third aspect of the present invention there is provided an image transfer assembly comprising an image sheet as defined for the second aspect of the present invention on a releasable carrier.

The term image as used in the present specification is intended to cover anything which changes the appearance of the surface being marked. The image may, for example, be a pattern comprised of individual, visually distinguishable elements. Alternatively the image may be a continuous colouration.

We have found, in accordance with the invention, that the surfaces of materials (and particularly flexible materials) may conveniently and effectively be provided with an image by means of an image sheet which is comprised with a layer of Shape Memory Polymer to which is bonded the image which it is desired to apply to the surface.

The image sheet (comprised of the Shape Memory Polymer and image) has particular advantages when used for providing an image on a flexible surface. These advantages result from the application process (in accordance with the first aspect of the invention) in which the image sheet is applied to the surface in a process which involves heating the SMP to a temperature above its glass transition temperature. As a result of the properties of SMP, the image sheet may be applied to a surface with a degree of force (which in certain circumstances may be relatively light and be provided by "brushing with the hand") so that the SMP layer unites, and effectively becomes "as one", with the surface being marked and able to flex therewith. Delamination of the SMP layer and the image is prevented by virtue of the latter being bonded to the former.

The surface being marked may be one having a degree of surface texture or "microtexture". Examples of such surfaces include leather (the texture being provided by the 'porous' nature of the surface) and textile fabrics (e.g. canvas) for

which the texture is provided by the overall fibrous make-up of the material. For such textured materials, the SMP layer becomes not only bonded to the surface but can be such as to be able faithfully to reproduce the surface texture.

The SMP layer may for example have a thickness of 4 to 200 microns but more preferably 20 to 60 microns. The actual thickness of the SMP layer employed will usually depend on the characteristics of the flexible material whereof the surface is to be marked. For example, if this material is a textile fabric then the thickness of the SMP layer (and for that matter the overall thickness of the image sheet) can be such as to maintain the handle (e.g. drape characteristics) of the fabric.

Examples of flexible materials that may be provided with images in accordance with the method of the first aspect of the invention include leather, textiles and synthetic plastics materials. The method may be applied for applying an image to a flat sheet of such a material or to such a material already in a pre-formed shape. Thus, for example, the method may be used for the application of images to planar or 3-Dimensional surfaces of shoes, which may for example be parts fashion shoes or sports shoes (e.g. walking shoes). Thus the image may be applied to a flat panel or around the toe-cap of such a shoe.

It is generally preferred that the SMP has a  $T_g$  value of 25-40°C. Values in this range will generally ensure the required flexibility for the SMP with lower values in the range providing improved flexibility. Suitable materials are available under the Trade Mark DIAPLEX.

---

Generally the thickness of the SMP layer will be 20 to 60 microns.

As indicated above, the image sheet comprises the SMP layer to which is bonded an image by means of an image key coat. Generally a "pre-image" assembly will be prepared comprised of the SMP layer having the image key coat on one surface thereof. This image key coat may for example be in the form of an adhesive or an adhesion promoter. Depending on the printing technique used for laying down

the image, an adhesive or adhesion promoter used as the image key coat may provide a surface that is sufficiently receptive for the ink. However for certain other types of ink, it may be necessary to provide an additional ink receptive layer that is bonded to the adhesive or adhesion promoter that provides an image key coat, the image then being printed onto that ink receptive layer.

Xerographic and ElectroInk images may generally be laid directly onto an image key coat which is in the form of an adhesive or adhesion promoter. However in the case of an ink jet image it will generally necessary to apply a so-called "ink jet coating" to such an adhesive or adhesion promoter layer (provided as the image key coat) before printing with the ink jet. Such "ink-jet coatings" layers are well known in the art.

A suitable material for providing the image key coat is a polyamide (such as Lioseal V7036 -ex Henkel) applied as a solution in isopropyl alcohol. The image is adhesively bonded (either directly or indirectly) to the SMP layer. The adhesive bonding may be by means of an adhesion promoter which may for example be provided by a polyamide (such as lioseal V7036 -ex Henkel) applied as a solution in iso-propyl alcohol.

The image is most preferably generated by, and printed under control of, computer software. Obviously a vast range of images may be printed under software control. The image may be one which has been printed using an ink jet printed or laid down by a printing technique involving use of a toner, e.g. by means of a Dry Toner Printer.

An image transfer assembly in accordance with the third aspect of the invention comprises the image transfer sheet on a releasable carrier. The releasable carrier most preferably comprises paper (particularly one having a basis weight of 80-150 gsm, more preferably 80-100 gsm) provided with a release surface. Most preferably the release surface is one which softens and/or releases at a temperature less than the  $T_g$  of the SMP, most preferably with a release force of 18-42 dynes per

sq cm. The release surface may for example be of polypropylene, polyethylene, polyester, wax or, particularly preferably, TPX (polymethyl-4-pentene).

It is also possible to release from the carrier (with the SMP layer) a release material (e.g. TPX) which is on the surface of the SMP layer remote from the image. Such a release material on the SMP surface will assist in preventing that surface of the SMP sticking to itself once the carrier has been removed.

The method of applying the image sheet (comprised of SMP layer and image bonding thereto) to the surface requires the use of an adhesive. This may be provided on that surface of the image sheet which is to be applied to the article being marked. Alternatively or additionally the adhesive may be provided on the surface itself. In all cases, the adhesive may be heat and/or pressure activated it is particularly preferred that the adhesive is a pressure sensitive adhesive. This allows the image sheet to be applied to the surface and if necessary removed until it is in the correct position. The adhesive may be one which can be subsequently cross-linked (e.g. by heat or uv-curing) so that the image sheet will remain permanently in place. The adhesive may be one that is heat activated a few degrees (e.g. 2-3°C) lower than the  $T_g$  value of the SMP layer. The adhesive may for example be an air-dried polyurethane adhesive which may be applied by coating or spraying. Generally the adhesive will be applied in an amount of 0.05 to 4.0 grams per square metre dry weight. An example of a suitable adhesive is an aqueous dispersion of an aliphatic polyester-polyurethane without free isocyanate groups, e.g. as available under the tradename 7461 Alberdingk Boley of Krefeld, Germany. Such an adhesive may be used to prime the imaged SMP and also the surface (e.g. leather) on which the image is to be provided.

The image sheet is applied to the surface (on which the image is to be formed) using heat and (usually) a degree of force (which may be relatively light). The heat employed is sufficient to raise the temperature of the SMP above its  $T_g$  value. The heat may, for example, be a device blowing hot air. The force may be applied, for example, by drawing the image sheet under vacuum against the surface to be marked. Alternatively the force may be by means of brushing by hand. With the application of

force, the SMP layer generally adapts itself to the surface (and characteristics thereof, e.g. texture) being imaged. It should however be the case that the  $T_g$  value of the SMP polymer is selected having regard to the nature of the surface being marked. Generally the  $T_g$  value will be in the range  $25^\circ$  to  $40^\circ\text{C}$ , but lower values in this range will have greater elasticity (when above their glass transition temperatures). Therefore when, say, applying an image to leather, using light brushing with the hand, the use of an SMP layer with a low glass transition temperature will ensure not only that the SMP layer can be manipulated to cover the surface being marked but also that the SMP polymer will be able to adopt the "microtexture" of the surface. This latter feature may not be possible if the  $T_g$  value of the SMP layer is too high.

On cooling, the film will endeavour to revert to its original form and effectively "tightens" on the surface to remain bonded thereto and (given that the appropriate  $T_g$  value has been selected) reproduce the surface characteristics thereof.

It will be appreciated that the releasable carrier may be removed at some stage during the application process, e.g. by peeling away from the (applied) image sheet whilst pressure is still applied ahead of the 'peel front'.

The adhesive that is used for bonding the image sheet to the surface being imaged may be one which is such that the image sheet may be removed by heating. This provides for the possibility of providing an article with different images, as desired. For example, if the article is a fashion shoe, then the applied image may be changed to suit circumstances (e.g. a current fashion trend, colour of other accessories worn etc).

If it should ultimately transpire that the image as applied to a surface (particularly a flexible surface such as leather) needs "freshening-up" in that wrinkles or other surface imperfections appear in the image then the application of heat to the surface (optionally with light hand brushing) will generally be sufficient to re-establish the original appearance.

It should be appreciated that the invention may adopt a number of forms. For example, the image sheets (comprised of the SMP layer and image), generally on a releasable carrier, may be manufactured and sold to an end user. This end user may for example be a manufacturer of articles (e.g. shoes) which are provided with an image (in accordance with the invention) prior to sale to the public. Alternatively the image sheets may be supplied for home use by a person who wishes to 'personalise' their possessions.

The image sheets may be supplied without application thereto of the adhesive that is to be used for bonding the sheet to the surface being marked. It is possible for an end user to apply additional design to the surface of the image prior to application. Such enhancement of the image may be provided by "under painting", "texturising" or "foiling".

Under-painting is a technique generally used when the target substrate is a dark colour and the image is required to both merge with the substrate and be visible through opacity. Under-painting is usually applied by a paint brush or air brush.

Texturising is a technique that is mostly used when the substrate, to which the image sheet is to be applied, is relatively flat. A texturising medium based, for example, on an air-drying acrylic paste.

Foiling is a technique generally involving the use of a hot roller laminator and cause for a pre-adhesion coat of adhesion promoter before it can be applied. The foiling technique can be either blanket or selective.

It is also possible, in accordance with the invention, to supply, to an end user, a 'pre-image' assembly comprised of a releasable carrier on which is provided an SMP layer with an image by coat to which an image is ultimately bonded. Depending on the way in which the image is to be printed, the "pre-image" assembly may also incorporate an extra layer (bonded to the image key coat) provided with an ink receptive surface, e.g. for the case where the image is to be printed by means of an ink

jet printer. The purchaser of such a 'pre-image' assembly may then apply an image of their choice (e.g. using an ink-jet printer) to produce an image sheet in accordance with the invention. Such an image may, for example, be one contained within a software package or one downloaded from the internet. The image sheet may then be adhesively bonded to a surface in accordance with the above described procedures.

The concepts outlined in the previous paragraph may be embodied, for example, in a kit supplied to a user. Such a kit may comprise the pre-image sheet, adhesive and a material to which the (ultimately formed) image sheet is applied. The kit may, for example, be one intended for producing a picture for hanging on a wall or the like. The material which is provided in the kit and to which the image sheet is to be applied may, for example, be canvas or similar material. The user may print onto the 'pre-image' sheet a picture of their choice and then apply the resulting image sheet to the canvas.

The invention will be further described, by way of example only, with reference to Figs 1-3 of the accompanying drawings which illustrate various embodiments of the invention.

Fig 1 illustrates a 'pre-image' assembly 1 provided on a release system 2. The pre-image assembly 1 comprises an SMP layer 3 on which is provided an image key coat 4 to which an image (not shown in Fig 1) is intended to be applied. The release system 2 comprises a paper carrier 5 laminated to a release layer 6, the latter being in face-to-face contact with the SMP layer 3.

Reference is now made to Fig 2 which illustrates an embodiment of image sheet 10 in accordance with the invention (like parts in Figs 1 and 2 are depicted by the same reference numerals and are not all therefore described further). The image sheet assembly 10 shown in Fig 2 incorporates an image receptor layer 11 applied to the image key coat 4. Applied to the image receptor layer 11 is an image 12, e.g. produced by means of an ink jet printer (not shown).

The image sheet 10 illustrated in Fig 2 may be applied to a surface using the techniques described more fully above.

Reference is now made to Fig 3 which illustrates an alternative embodiment of image sheet assembly 20 in accordance with the invention, (like parts in Figs 2 and 3 are depicted by the same reference numerals so therefore are not all described further). In the image sheet 20 of Fig 3, the image layer 12 is one that has been laid directly onto the image key coat 4. This will generally be possible in the case of a Xerographic or ElectroInk image. Additionally a pre-application enhancement layer 21 (e.g. 'under-painting', 'foiling' or 'texturing') has been applied to the image layer 12. Additionally Fig 3 shows an adhesion promotion layer 22 which is used for bonding the image sheet to a surface.

**CLAIMS**

1. A method of providing a surface of a material with an image, the method comprising applying to the surface an image sheet comprised of
  - (i) a flexible layer of a Shape Memory Polymer (or like material), and
  - (ii) an image bonded to said layer by means of an image key coat,and bonding said image sheet to the surface by means of an adhesive and a process which involves heating of the Shape Memory Polymer (or like material) to a temperature above its Glass Transition Temperature.
2. A method as claimed in claim 1 wherein the material is flexible.
3. A method as claimed in claim 1 or 2 wherein the material is leather, a textile material or a synthetic plastics material.
4. A method as claimed in claim 3 wherein the material is leather.
5. A method as claimed in any one of claims 1 to 4 wherein the SMP has a  $T_g$  value of 25-45°C.
6. A method as claimed in any one of claims 1 to 5 wherein the SMP layer has a thickness of 20 to 60 microns.
7. A method as claimed in any one of claims 1 to 6 wherein the image key coat comprises an adhesive or an adhesion promoter.
8. A method as claimed in claim 7 wherein an ink receptive layer is provided between the image and the layer of the adhesive or adhesion promoter providing the image key coat.

9. A method as claimed in any of claims 1 to 8 wherein the adhesive for bonding the image sheet to the material is a heat activated adhesive which is activated at a temperature 2-3° lower than the Glass Transition Temperature of the SMP layer.

10. An image sheet comprised of

- (i) a flexible layer of a shape memory polymer (or like material), and
- (ii) an image bonded to said layer by means of an image key coat.

11. An image sheet as claimed in claim 10 wherein the SMP has a  $T_g$  value of 25-45°C.

12. An image sheet as claimed in claim 10 or 11 wherein the SMP layer has a thickness of 20 to 60 microns.

13. An image sheet as claimed in any one of claims 10 to 12 wherein the image key coat comprises an adhesive or an adhesion promoter.

14. An image sheet as claimed in claim 13 wherein an ink receptive layer is provided between the image and the layer of the adhesive or adhesion promoter providing the image key coat.

15. An image sheet as claimed in any of claims 10 to 14 provided with an adhesive for bonding the SMP layer and image to the surface of a material.




16. An image sheet as claimed in claim 15 wherein said adhesive is a heat activated adhesive which is activated at a temperature 2-3° lower than the Glass Transition Temperature of the SMP layer.

17. An image transfer assembly comprising an image sheet as claimed in any one of claims 10 to 16 on a releasable carrier.


18. A kit comprising:

- (i) a 'pre-image' assembly comprised of a releasable carrier on which is provided an SMP layer with an image key coat layer associated with an ink receptive surface,
- (ii) an adhesive, and
- (iii) a material for application of an image thereto.

19. A 'pre-image' assembly comprised of a releasable carrier on which is provided an SMP layer with an image key coat layer associated with an ink receptive surface,

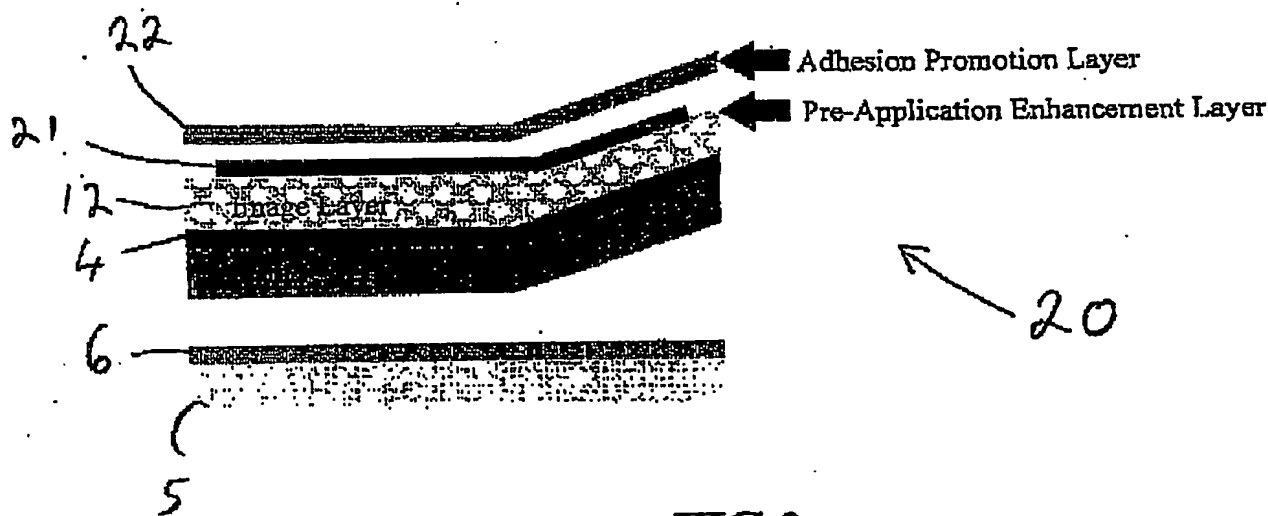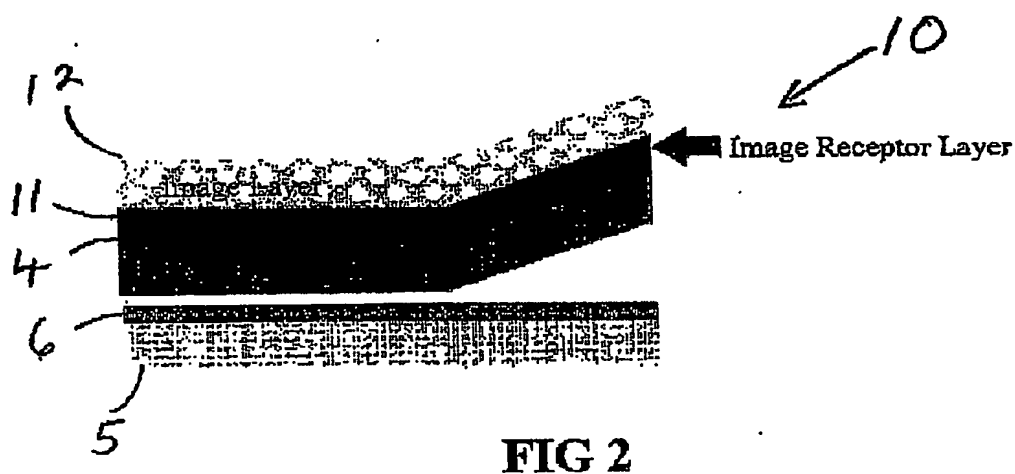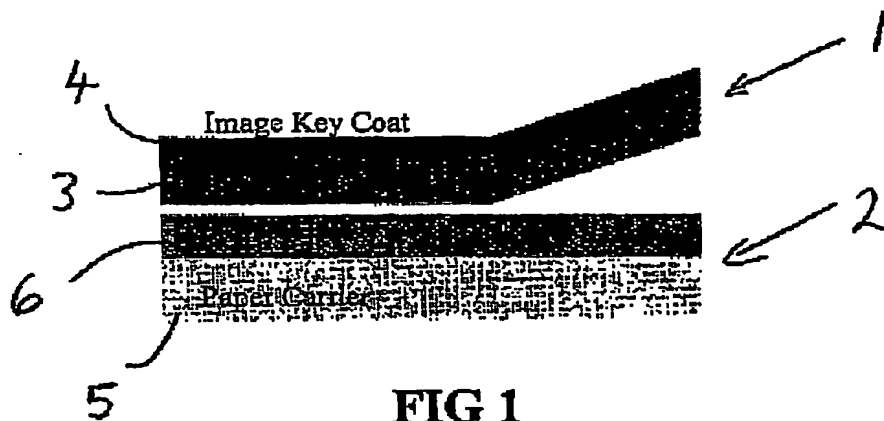

PCT Application  
PCT/GB2004/000217



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: \_\_\_\_\_**

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**